



Product code
DPC01PAH048ST65


Info

Line Start Box

It merges data and low voltage power in a DHSLC line, making installation easy and enhancing system reliability. Performs galvanic insulation of data input and guarantees overcurrent protection. Enclosed in a waterproof metal box, it can be installed close to the fixtures, even in harsh environments. No addressing, coding or configuration is needed.

Features

Supply voltage	Powered by the fixtures power supply, from 24 VDC to 48 VDC, class III
Input power	3 W
Mounting	Surface, DIN rail mounting bracket optional
Protection rating	IP 65
Weight	0,50 kg

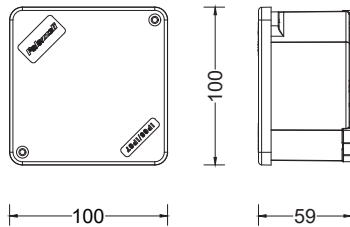

Temperature limits

Working temperature	from -30C° to +50C°
Storage temperature	from -50C° to +80C°

Features

Allows to merge DHSLC differential signal (from ArtNet2DHSLC devices) with power line, to be used at the beginning of a DHSLC line; provides galvanic insulation between signal input and output

Construction

Painted aluminium die cast enclosure, polyurethane gaskets