



Product code  
**AID01PAA048ST56**

### Info

#### ArtNet2DHSLC

It is an ArtNet to DHSLC converter, with two outputs. On large scale setups, when multiple DHSLC lines are needed, it is useful to distribute data from the controller via standard Ethernet infrastructure; locally, ArtNet2DHSLC 2 devices transfer Ethernet data into DHSLC packets, to control colour changing devices and enabling all DHSLC features (high speed, self addressing). ArtNet2DMX02 is compatible with DHSLC products and with ArtNet protocol. It can control up to 2 DHSLC lines.

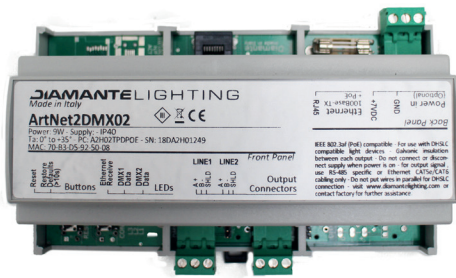

### Features

Supply voltage	7 VDC 300 mA max, fused, or IEEE802.3af (PoE) for supply via PoE-enabled Ethernet Switch, class III
Input power	5 W
Mounting	DIN rail mount (EN50022) (9 modules)
Protection rating	IP 20
Weight	0,60 kg

### Temperature limits

Working temperature	from -30C° to +55C°
Storage temperature	from -50C° to +80C°

### Features

Provides conversion from ArtNet data to DHSLC data, enabling the use of standard lighting tools with proprietary self addressing DHSLC protocol.

### Maximum capacity

2 output lines, 150 (RGB) pixels maximum each.

### Construction

Self extinguishing PC/ABS Blend, RAL 7035 according to DIN 43880.